

**PRODUCT BRIEF**

**1500W  
POWER  
COMBINER**

**VISIONAIRtronics GmbH**

Grabengasse 29.  
7142 Illmitz, Austria



**T** +43-2167-90618 00

**E** [info@vat.aero](mailto:info@vat.aero)

**W** [www.vat.aero](http://www.vat.aero)

**The Ideal Diode Power Combiner takes two power sources and combines them into one, creating redundancy without sacrificing efficiency.**

A power diode may drop a volt or more when carrying 25 Amps. This may not sound like a lot, but at 25 Amps this equates to 25W which is a lot of power to get rid of as heat. The Ideal Diode Power Combiner typically drops less than 100mV at the same current, equating to less than 2.5W.

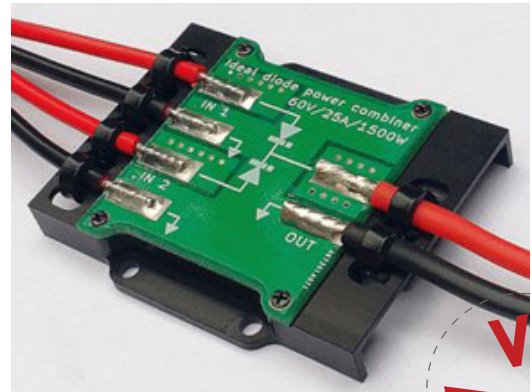

FEATURES

**FEATURES**

- 60 VDC, 25 Amps (1500W max.)
- Inputs reverse polarity protected and tolerant of transients up to +100V.
- Robust mechanical enclosure with integrated cable strain-relief.
- Conformally-coated PCB for moisture resistance.
- Weight: 30g.
- Dimensions: 60.0 x 49.0 x 8.2mm

**OPERATION**

The Ideal Diode Power Combiner works just like a pair of diodes with their cathodes connected together: power enters at the anodes and exits at the cathode. There is, however, a key difference to be aware of.

Unlike diodes – which do not need a ground connection to work correctly – the Ideal Diode Power Combiner must have a ground connection because it contains active devices. A ground terminal is provided for both of the input terminals and also for the output terminal. These are all connected together internally. At least one ground terminal must be connected.


**Use with ESCs**

One possible application for this device is to power an ESC (Electronic Speed Controller) from a pair of batteries. Be aware that regenerative braking only works if there is a path for regenerated current to make its way back into the batteries, and any sort of diode – real or ideal – in the way will prevent this. Regenerative braking must be turned off in this situation or damage will occur.



## DIAGRAM

This is a greatly simplified diagram showing only the main power pathways. Diodes shown are symbolic;

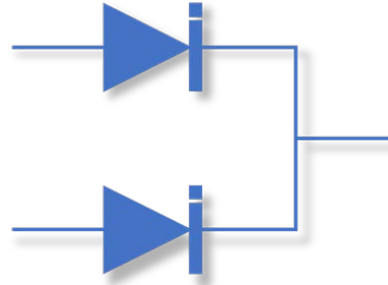

Internal Architecture

## SPECIFICATIONS IN BRIEF

### Electrical

<b>Voltage</b>	Operational: +6 to +60 VDC; Absolute max.: -60 to +66 VDC
<b>Current</b>	25 Amps continuous
<b>Forward power handling</b>	1500 Watts continuous
<b>Forward voltage drop</b>	200mV maximum
<b>Quiescent current consumption</b>	4mA typical

### Miscellaneous

<b>Dimensions</b>	60 x 49 x 8.2mm
<b>Operating temperature range</b>	-40°C to + 85°C
<b>Weight</b>	30g
<b>Mounting</b>	4 x 3.2mm diameter holes (sized for M3 screws), located on 23 x 43mm rectangle
<b>Connections</b>	6 x gold-plated solder pads, with securing points for individual cable strain reliefs

